

日本 FUJI 富士冷却泵



公司名称：上海梁瑾机电设备有限公司

联系人：杨少银 13916695992(微信) 13661935973

QQ:1774474796

电话:021-60538280 传真:021-57872573

网址：<http://www.liangjingb.com> <http://www.liangjindy.com>

<http://www.ijqb.com> <http://www.yangshaoyin.com>

地址：中国上海上海市松江区茜浦路 850 弄 33 号

VKA series 不锈钢多段中高压冷却泵

Low flow/Medium head/Multi-stage immersion type





特点 Feature



- (1) 采用无机械轴封设计, 节省维修上的不便
With no mechanical seals design to save the maintenance
- (2) 符合欧盟RoHS及CE要求规范
Qualify with EU RoHS Directive and European Standards(EN) compliant
- (3) 可搭配变频使用(10-60HZ)
Energy-saving operation by the inverter

特性曲线 Characteristic curve

50Hz / 转速 1mm²/s

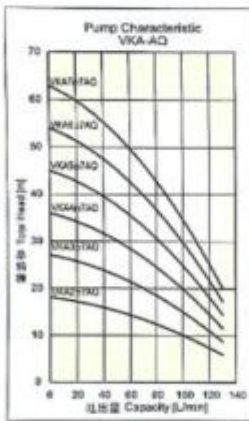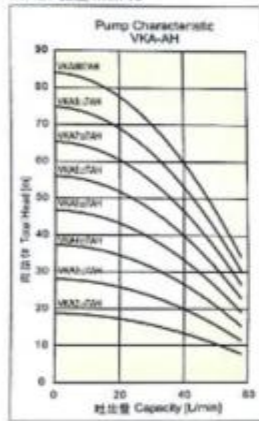

60Hz / 转速 1mm²/s

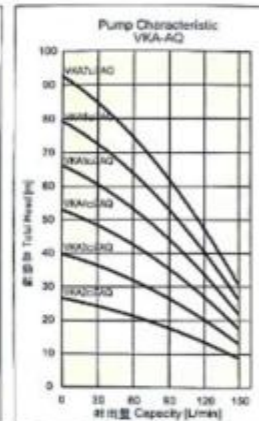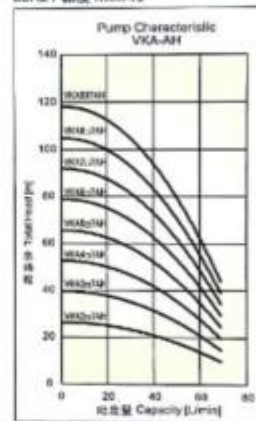

■ 压力型

规格/机型	VKA2□7AH	VKA3□7AH	VKA4□7AH	VKA5□7AH	VKA6□7AH	VKA7□7AH	VKA8□7AH	VKA9□7AH
输出功率 output (kW)	0.2 0.34	0.3 0.51	0.4 0.68	0.5 0.85	0.6 1.02	0.7 1.19	0.8 1.36	0.9 1.53
额定电压 rated voltage (V)	200 220	200 220	200 220	200 220	200 220	200 220	200 220	200 220
频率 frequency (Hz)	50 60	50 60	50 60	50 60	50 60	50 60	50 60	50 60
额定电流 rated current (A) (参考 reference)	1.7 2.3	2.3 3.1	2.7 3.9	3.7 5.1	4.1 5.8	4.6 5.9	7 8.0	7 8.8
流量 delivery quantity (L/min)	40 50	40 50	40 50	40 50	40 50	40 50	40 50	40 50
总扬程 total head (m)	13 17	20 26	27 35	33 44	40 53	47 61	54 71	60 80
使用黏度上限 max. viscosity (mm ² /s)	75	75	75	75	75	75	75	75
标准管径 inlet/outlet (Rp)	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4

■ 流量型

规格/机型	VKA2□7AQ	VKA3□7AQ	VKA4□7AQ	VKA5□7AQ	VKA6□7AQ	VKA7□7AQ
输出功率 output (kW)	0.36 0.6	0.54 0.9	0.72 1.2	0.9 1.5	1.1 1.8	1.26 2.1
额定电压 rated voltage (V)	200 220	200 220	200 220	200 220	200 220	200 220
频率 frequency (Hz)	50 60	50 60	50 60	50 60	50 60	50 60
额定电流 rated current (A) (参考 reference)	2.4 3.5	3.2 5.1	3.9 5.7	5.2 7.0	7 8.3	7 8.3
流量 delivery quantity (L/min)	85 100	85 100	85 100	85 100	85 100	85 100
总扬程 total head (m)	12 16	18 25	23 33	29 41	35 49	40 57
使用黏度上限 max. viscosity (mm ² /s)	75	75	75	75	75	75
标准管径 inlet/outlet (Rp)	3/4	3/4	3/4	1-1/4	1-1/4	1-1/4

公司名称: 上海梁瑾机电设备有限公司

联系人: 杨少银 13916695992(微信) 13661935973

QQ:1774474796

电话:021-60538280 传真:021-57872573

网址: <http://www.liangjinqb.com> <http://www.liangjindy.com>

<http://www.ijqb.com> <http://www.yangshaoyin.com>

地址: 中国上海上海市松江区茜浦路 850 弄 33 号




VKP series

浸水式低压冷却泵
Low-Medium flow/Low head/Single-stage immersion type


特点 Feature

- (1) 浸水式结构设计
The pump is immersed in the liquids when in use
- (2) 泵浦有多种长度选择搭配
Long and short-leg types available to suit various tank depths
- (3) 符合欧规RoHS及CE要求规范
Quality with EU RoHS Directive and European Standards(EN) compliant

外型尺寸图
Externals dimensional drawing

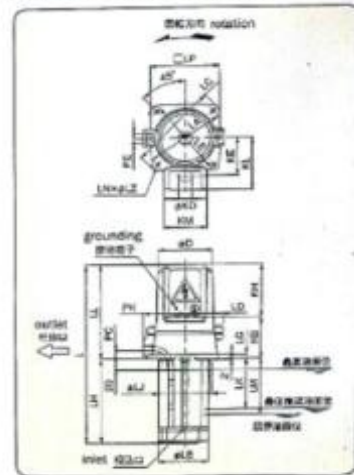

特性曲线
Characteristic curve

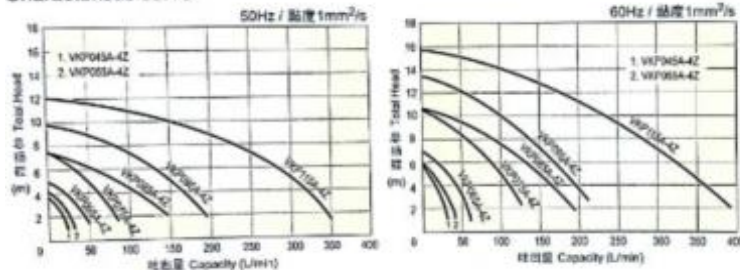

规格/机型

规格/机型 model	VKP045A-4Z		VKP055A-4Z		VKP065A-4Z		VKP075A-4Z		VKP085A-4Z		VKP095A-4Z		VKP115A-4Z	
输出功率 output (kW)	40		60		100		180		250		400		750	
额定电压 rated voltage (V)	380 400 415	400 440	380 400 415	400 440	380 400 415	400 440	380 400 415	400 440	380 400 415	400 440	380 400 415	400 440	380 400 415	400 440
频率 frequency (Hz)	50	60	50	60	50	60	50	60	50	60	50	60	50	60
额定电流 rated current (A) (参考 reference)	0.16 0.16 0.17	0.16 0.16	0.19 0.20 0.22	0.18 0.18	0.28 0.28 0.29	0.25 0.25	0.44 0.43 0.42	0.5 0.5	0.65 0.6 0.6	0.75 0.75	1.2 1.2 1.2	1.3 1.2 1.2	1.7 1.7 1.7	1.9 1.8
流量 delivery quantity (L/min)	19	25	20	30	45	60	75	100	110	160	140	200	165	285
总扬程 total head (m)	1.5		2		2		3		4		5		7	
使用粘度上限 max. viscosity (mm²/s)	300		150		300		150		300		150		300	
标准管径 inlet/outlet (Rp)	1/4		3/8		3/8		1/2		3/4		1		2	

机型 model	图	尺寸 dimension (mm)																				重量 (kg) weight					
		D	KB	KD	KE	KH	KL	KM	L	LA	LB	LC	LD	LE	LG	LH	LJ	LK	LL	LM	LN		LP	LZ	PC	PE	PK
VKP045A-4Z	2	92	62.5	22	67	93	93	73	298	130	90	145	-	130	8	150	90	100	148	110	4	125	7	15	Rp1/4	62.5	5.5
VKP055A-4Z	3	92	74	22	67	93	93	73	317	132	90	152	64	134	8	150	90	100	167	110	4	116	7	15	Rp3/8	71	6.0
VKP065A-4Z	3	92	74	22	67	93	93	73	317	132	90	152	64	134	8	150	90	100	167	110	4	116	7	15	Rp3/8	71	6.5
VKP075A-4Z	3	111	94	22	78	93	104	73	367	160	115	184	75	134	10	180	115	105	187	130	1	143	20	20	Rp1/2	80	10.0
VKP085A-4Z	4	122	106	22	81	93	107	73	449	160	128	194	80	170	10	250	128	165	199	190	4	154	10	25	Rp3/4	85	15.0
VKP095A-4Z	6	121	117	22	94	93	122	87	524	180	135	-	-	-	15	280	135	160	244	200	2	155	10	30	Rp1	100	16.5
VKP115A-4Z	9	162	152	22	105	93	133	87	565	220	160	-	-	-	12	280	160	220	285	-	4	200	12	55	Rp2	115	29.0

公司名称: 上海梁瑾机电设备有限公司
 联系人: 杨少银 13916695992(微信) 13661935973
 QQ:1774474796
 电话:021-60538280 传真:021-57872573
 网址: <http://www.liangjinqb.com> <http://www.liangjindy.com>
<http://www.ijqb.com> <http://www.yangshaoyin.com>
 地址: 中国上海上海市松江区茜浦路 850 弄 33 号




VKN series

自吸式低压冷却泵
Low-Medium flow/Low head/Single-stage self-priming type


特色 Feature

- (1) 轻量化一体设计
Small size and lighter weight design
- (2) 自吸式结构, 安装方便
Easy to install by the self-priming function
- (3) 符合欧盟RoHS及CE要求规范
Quality with EU RoHS Directive and European Standards(EN) compliant

外型尺寸图
Externals dimensional drawing

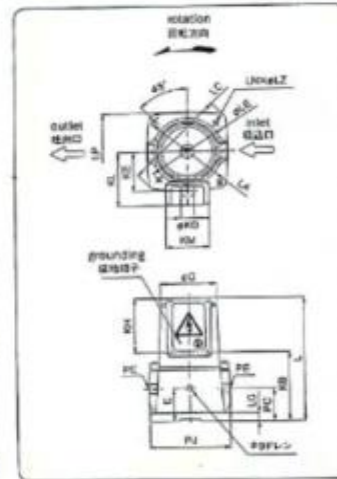

特性曲线
Characteristic curve

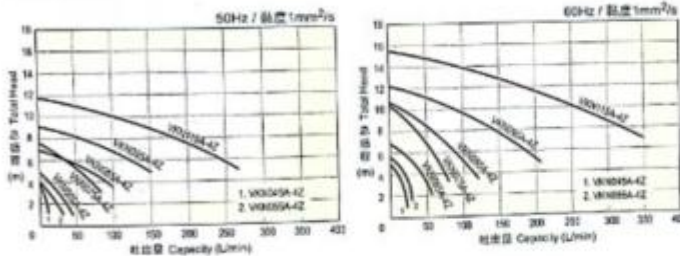

规格/机型

规格/机型 model	VKND45A-4Z		VKN055A-4Z		VKN065A-4Z		VKN075A-4Z		VKN085A-4Z		VKN095A-4Z		VKN115A-4Z	
输出功率 output (kW)	380	400	380	400	380	400	380	400	380	400	360	400	380	400
额定电压 rated voltage (V)	400	440	400	440	400	440	400	440	400	440	400	440	400	440
频率 frequency (Hz)	50	60	50	60	50	60	50	60	50	60	50	60	50	60
额定电流 rated current (A) (参考 reference)	0.16	0.16	0.19	0.18	0.28	0.25	0.43	0.5	0.65	0.75	1.2	1.3	1.7	2.3
流量 delivery quantity (L/min)	13	16	16	24	39	50	50	67	95	130	140	200	230	320
总扬程 total head (m)	1.5		2		2		3		4		5		7	
最大吸入管长 (m)	0.7		0.7		0.7		0.7		0.6		0.7		0.7	
使用粘度上限 max. viscosity (mm ² /s)	200		75		200		75		200		75		200	
标准管径 inlet/outlet (Rp)	1/4		3/8		3/8		1/2		3/4		1		1-1/2	

机型 model	图	尺寸 dimension (mm)														重量 (kg)					
		D	E	KB	KD	KE	KH	KL	KM	L	LA	LC	LE	LG	LN		LP	LZ	PC	PE	PJ
VKND45L	1	92	44	151	-	-	61	-	183	130	145	-	13	4	125	7	44	Rp1/4	123	4.5	
VKN045A-4Z	2	92	44	96	22	67	93	93	73	169	130	145	-	13	4	125	7	44	Rp1/4	125	4.5
VKN055A-4Z	2	92	57	119	22	67	93	93	73	212	130	169	132	14	4	131	7	56	Rp3/8	132	6.5
VKN065A-4Z	2	92	56	119	22	67	93	93	73	212	150	169	132	14	4	131	7	56	Rp3/8	132	7.5
VKN075A-4Z	2	111	63	143	22	78	93	104	73	236	164	194	160	15	4	153	10	63	Rp1/2	150	11.0
VKN085A-4Z	2	122	71	157	22	81	93	107	73	250	170	194	160	15	4	153	10	71	Rp3/4	160	12.5
VKN095A-4Z	3	131	81	156	22	94	93	122	87	296	180	200	-	15	2	-	10	85	Rp1	160	14.0
VKN115A-4Z	4	182	116	231	22	105	93	133	87	364	220	253	-	28	4	200	12	135	Rp1-1/2	280	29.0

公司名称: 上海梁瑾机电设备有限公司
 联系人: 杨少银 13916695992(微信) 13661935973
 QQ:1774474796
 电话:021-60538280 传真:021-57872573
 网址: <http://www.liangjinqb.com> <http://www.liangjindy.com>
<http://www.ijqb.com> <http://www.yangshaoyin.com>
 地址: 中国上海上海市松江区茜浦路 850 弄 33 号

外型尺寸图 Externals dimensional drawing

机型 Model	尺寸 Dimension (mm)			机型 Model	尺寸 Dimension (mm)		
	LH	L	LK		LH	L	LK
VKA237AH-S	141	358	112	VKA457AH-S	177	394	148
VKA247AH-S	159	376	130	VKA467AH-S	195	412	166
VKA257AH-S	177	394	148	VKA477AH-S	213	430	184
VKA267AH-S	195	412	166	VKA487AH-S	231	448	202
VKA277AH-S	213	430	184	VKA497AH-S	249	466	220
VKA287AH-S	231	448	202	VKA237AQ-S	168	395	139
VKA297AH-S	249	466	220	VKA247AQ-S	195	412	166
VKA337AH-S	141	358	112	VKA257AQ-S	222	439	193
VKA347AH-S	159	376	130	VKA267AQ-S	249	466	220
VKA357AH-S	177	394	148	VKA277AQ-S	276	493	247
VKA367AH-S	195	412	166	VKA287AQ-S	303	520	274
VKA377AH-S	213	430	184	VKA297AQ-S	330	547	301
VKA387AH-S	231	448	202				
VKA397AH-S	249	466	220				
VKA447AH-S	159	376	130				

机型 Model	尺寸 Dimension (mm)			机型 Model	尺寸 Dimension (mm)		
	LH	L	LK		LH	L	LK
VKA557AH-S	177	428	148	VKA347AQ-S	195	446	166
VKA567AH-S	195	446	166	VKA357AQ-S	222	473	193
VKA577AH-S	213	464	184	VKA367AQ-S	249	500	220
VKA587AH-S	231	482	202	VKA377AQ-S	276	527	247
VKA597AH-S	249	500	220	VKA387AQ-S	303	554	274
VKA667AH-S	195	446	166	VKA397AQ-S	330	581	301
VKA677AH-S	213	464	184	VKA447AQ-S	195	446	166
VKA687AH-S	231	482	202	VKA457AQ-S	222	473	193
VKA697AH-S	249	500	220	VKA467AQ-S	249	500	220
VKA777AH-S	213	464	184	VKA477AQ-S	276	527	247
VKA787AH-S	231	482	202	VKA487AQ-S	303	554	274
VKA797AH-S	249	500	220	VKA497AQ-S	330	581	301
VKA887AH-S	231	482	202				
VKA897AH-S	249	500	220				
VKA337AQ-S	168	419	139				

机型 Model	尺寸 Dimension (mm)			机型 Model	尺寸 Dimension (mm)		
	LH	L	LK		LH	L	LK
VKA997AH-S	249	544	220	VKA577AQ-S	276	571	247
VKA557AQ-S	222	517	193	VKA587AQ-S	303	598	274
VKA567AQ-S	249	544	220	VKA597AQ-S	330	625	301
VKA577AQ-S	276	571	247	VKA667AQ-S	249	544	220
VKA587AQ-S	303	598	274	VKA677AQ-S	276	571	247
VKA597AQ-S	330	625	301	VKA687AQ-S	303	598	274
VKA667AQ-S	249	544	220	VKA697AQ-S	330	625	301
VKA677AQ-S	276	571	247	VKA777AQ-S	276	571	247
VKA687AQ-S	303	598	274	VKA787AQ-S	303	598	274
VKA697AQ-S	330	625	301	VKA797AQ-S	330	625	301
VKA777AQ-S	276	571	247				
VKA787AQ-S	303	598	274				
VKA797AQ-S	330	625	301				

1. 产品备有多种电压选择。
There is different voltage can be selected.
2. 本公司保有型录规格内容修订权且不另行通知。
It will be with no notice when catalogue specification changed.

公司名称: 上海梁瑾机电设备有限公司
 联系人: 杨少银 13916695992(微信) 13661935973
 QQ:1774474796
 电话:021-60538280 传真:021-57872573
 网址: <http://www.liangjinqb.com> <http://www.liangjindy.com>
<http://www.ijqb.com> <http://www.yangshaoyin.com>
 地址: 中国上海上海市松江区茜浦路 850 弄 33 号




VKD series


浸水式大流量冷却泵
Medium-High flow/Medium head/multi-stage immersion type

- 特色 Feature**
- (1) 抗脏污液体汲取的特殊设计
Strong and tough enough to resist dirty liquids
 - (2) 采用无机机械轴封设计,节省维修上的不便
With no mechanical seals design to save the maintenance
 - (3) 符合欧盟RoHS及CE要求规范
Quality with EU RoHS Directive and European Standards(EN) compliant

外型尺寸图
Externals dimensional drawing

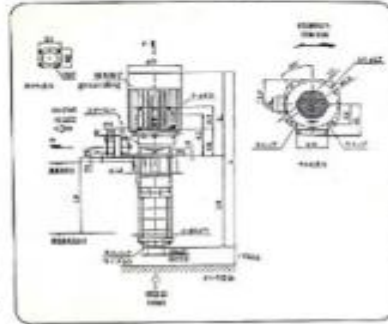

特性曲线 Characteristic curve

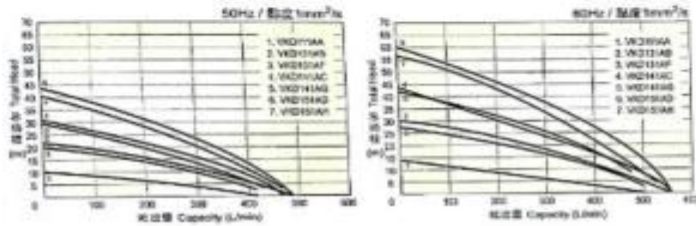

规格/机型

规格/机型 model	VKD111AA	VKD131AB	VKD141AC	VK161AD	VKD131AF	VKD141AG	VKD151AH
输出功率 output (kW)	0.75	1.5	2.2	3.0	1.5	2.2	3
额定电压 rated voltage (V)	200 220	200 220	200 220	200 220	200 220	200 220	200 220
频率 frequency (Hz)	50	60	50	60	50	60	50
额定电流 rated current (A) (参考 reference)	4.7 4.9	7.6 9.2	10 9.2	13.7 13.2	16 16	17.3 9.2	7.6 10 13.7 13.8 16 17.3
流量 delivery quantity (L/min)	10-30	18-40	15-40	10-50	15-40	18-50	10-60
总扬程 total head (m)	3-4	12-4	20-7	28-7	23-9	40-9	40-14
使用黏度上限 max. viscosity (mPa·s)	75	75	75	75	75	75	75
标准管径 inlet/outlet (Rp)	1-1/2						

机型 model	图	尺寸 dimension (mm)																重量(kg) weight								
		D	KB	WC	KD	KE	KH	NL	KM	L	LA	LB	LC	LG	LH	LJ	LL		LK	LN	LP	LZ	PC	PE	PK	
VKD111AA	1	162	139	-	22	109	93	137	87	530	215	161	239	8	250	165	31	272	190	4	215	13	42	Rp1-1/2	130	24.0
VKD131AB	2	202	87	152	27	89	102	136	123	594	215	161	226	8	250	165	31	336	190	4	215	13	40	Rp1-1/2	130	34.0
VKD131AF	4	202	117	162	27	89	102	136	123	758	225	161	230	8	402	165	31	368	334	4	215	9	45	Rp2	178	39.0
VKD141AC	2	202	87	152	27	89	102	136	123	594	215	161	229	8	258	165	31	336	190	4	215	13	40	Rp1-1/2	130	36.0
VKD141AG	4	202	117	162	27	89	102	136	123	760	225	161	230	8	402	165	31	368	334	4	215	9	45	Rp2	128	41.0
VKD151AD	3	232	87	152	27	89	102	136	123	642	215	161	239	8	306	165	31	330	238	4	215	13	40	Rp1-1/2	120	39.0
VKD151AH	4	232	117	162	27	89	102	136	123	798	225	161	230	8	402	165	31	368	334	4	215	9	45	Rp2	128	44.0



亚台富士精机股份有限公司
Atai Fuji Motor Co., Ltd.
台湾省桃园县芦竹乡长兴路二段32号
No. 32, Sec. 2, Chang-Hsing Rd., Lu Chu Hsiang,
Taoyuan Hsien, Taiwan
Tel: +886-3-321-3030 Fax: +886-3-321-7890



公司名称: 上海梁瑾机电设备有限公司
 联系人: 杨少银 13916695992(微信) 13661935973
 QQ:1774474796
 电话:021-60538280 传真:021-57872573
 网址: <http://www.liangjinqb.com> <http://www.liangjindy.com>
<http://www.ijqb.com> <http://www.yangshaoyin.com>
 地址: 中国上海上海市松江区茜浦路 850 弄 33 号